

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 November 2003 (27.11.2003)

PCT

(10) International Publication Number
WO 03/097919 A1

(51) International Patent Classification⁷: **D06F 37/04**

(21) International Application Number: **PCT/TR03/00043**

(22) International Filing Date: **16 May 2003 (16.05.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
2002/01346 **17 May 2002 (17.05.2002) TR**

(71) Applicant (for all designated States except US): **ARÇELİK A.S.** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ÖZTÜRK, Umud, Esad** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR). **YAVUZ, Nihat** [TR/TR]; E5 Ankara Asfaltı


üzeri, Tuzla, 34950 İstanbul (TR). **BAYRAM, Bertan** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR). **KORKUT, Avcı** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR). **DEMIRHAN, Dogan** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR). **KEMERDERE, Nursan** [TR/TR]; E5 Ankara Asfaltı üzeri, Tuzla, 34950 İstanbul (TR).

(74) Agent: **ANKARA PATENT BUREAU LIMITED**; Sehit Adem Yavuz Sok. No:8/22, Kizilay, 06440 ANKARA (TR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: **A DRUM**

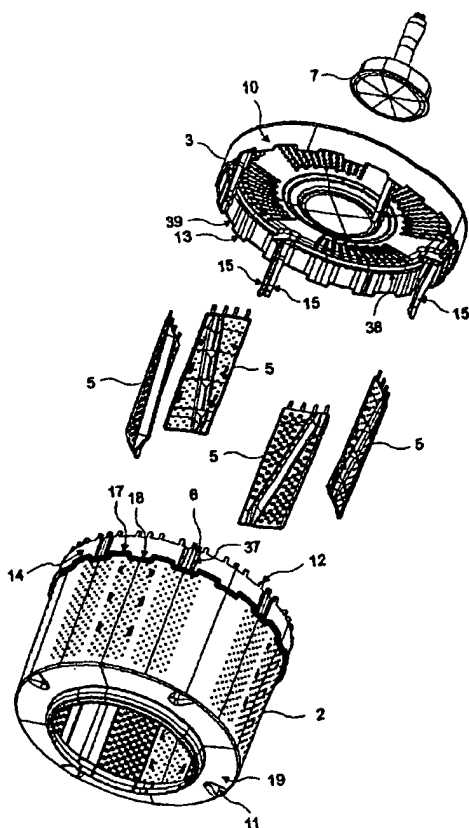

(57) Abstract: The present invention is related to a drum (1), used in washing machines, preferably laundry machines, into which laundry to be washed is to be placed, capable of performing washing by rotational movement around its central axis, preferably made of plastic, comprising a main body (2) and a rear cover (3), whereby said rear cover (3) comprises a circular edge (10) which surrounds the main body (2) and the main body (2) comprises an edge socket (14) in which the rear cover edge is located, the main body (2) and the rear cover (3) being connected to each other without forming any protrusion on the outer face of the drum (1).

WO 03/097919 A1



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

A DRUM

The present invention is related to a drum of plastic material used in washing or drying machines, preferably front-loading washing machines, capable of performing washing operation by rotating.

5

In the state of the art, washing machines, preferably laundry machines comprise a fixed tub and a drum rotating inside such a tub. As an outcome of unbalanced distribution of laundry inside the revolving drum, during the washing, the centre of gravity of objects spinning around drum axis in laundry machines goes away from rotational axis. Thus, centrifugal forces affect all the components of washing machines, particularly the fixed tub and the revolving drum. It is preferred to produce revolving drums from metal plates instead of plastic materials with respect to strength against excessive load and methods of manufacturing.

15

US Patent 5167898 describes a mold group enabling production of a single piece plastic drum comprising perforations with openings in the form of teardrops.

In the EP 0595040, a tub is described having perforations formed by cutting from projections outside which are inside towards extending from outside in order to prevent harming of the laundries inside the tub by the flash.

25

In EP0854223, a fastening method by riveting for a plastic tub is described.

In the EP 0789104 a system of fastening for holding a plastic tub made of two pieces by using claws, is described.

The object of this invention is to achieve a plastic drum rotating around its central axis for household appliances, preferably for laundry machines.

5 Drum embodied to attain the objects of this invention has been shown in figures attached, where

Figure 1 is a three-dimensional front view of a washing/drying machine.

Figure 2 is a schematic view of a washing/drying machine comprising a drum and a tub.

10 Figure 3a is a three-dimensional front view of a drum,

Figure 3b is a three-dimensional rear view of a drum.

Figure 4a is an exploded rear three-dimensional view of a drum.

Figure 4b is an exploded three-dimensional front view of a drum.

Figure 5a is a three-dimensional rear view of back cover.

15 Figure 5b is a three-dimensional front view of back cover

Figure 6a is a perspective rear view of a drum cut into half

Figure 6b is a perspective front view of a drum cut into half

Figure 7a is a perspective view taken before rivets, which ensure joining main body and rear part together, are crushed.

20 Figure 7b is a perspective view taken after rivets, which ensure joining main body and rear part together, are crushed.

The parts are numbered as follows:

1-Drum

2-Main body

- 3-Rear cover
- 4-Rib
- 5-Attachable plate
- 6-Discharge duct
- 5 7-Torque conveyor
- 9-Body hole (orifice)
- 10- Edge
- 11-Rib gap
- 12-Rivet projection
- 10 13-Edge coupling extension
- 14-Edge socket
- 15-Drum claw
- 16-Drum claw recess
- 17-Edge socket coupling projection
- 15 18-Edge socket coupling recess
- 19-Front surface
- 21-Resting duct
- 22-Washing/drying machine
- 23-Tub
- 20 26-Angular cover support
- 27-Circular cover support
- 28-Cover slot

- 29-Support ring
- 30- Curved cover support
- 31-Rivet socket
- 32-Rivet head
- 5 37-Duct discharge hole
- 38-Drum discharge hole
- 39-Edge coupling recess
- 40-Trace hiding socket

- 10 Washing/drying machines, preferably in front loading washing machines, a motor is provided to activate the machine, a fixed tub (23) into which the washing fluid is filled and discharged, a drum (1) made of a non-filler polymeric material such as a thermoplastic material or a material with filler such as fiber, calcium carbonate into which laundries to be washed are placed, rotating by the
- 15 motor around its central axis. Drum (1) comprises a main body (2) and a rear cover (3).

- 20 Rear cover (3) comprises a circular edge (10) surrounding the main body (2). Edge (10) comprises more than one edge coupling extension (13) and more than one edge coupling recesses (39) ensuring rear cover (3) to facilitate the rotation of the main body (2).

- 25 The main body (2) comprises an edge socket (14) into which an edge (10) is located on its outer surface. Edge socket (14) comprises an edge socket coupling recess (18) fitting into the edge coupling projection (13) and an edge socket coupling projection (17) fitting into the edge coupling recess (39). On the edge socket (14), a discharge duct (6) is provided to facilitate discharge of

washing fluids. On the discharge duct (6), one or more discharge holes (37) opening into the inner wall of the main body (2) are provided. On rear cover (3), at a location where the edge (10) meets back cover (3), there is a resting duct (21) on which the edge socket (14) projection rests. Inside the resting duct (21), there are one or more drum discharge holes (38) ensuring discharge of washing fluid accumulated on the connecting edge between rear cover (3) and main body (2).

The rear cover (3) comprises a torque conveyor (7) made of a material different from that of the drum, transferring the power from the motor to the drum to rotate the drum (1). Torque conveyor (7) is preferably made of aluminum material to reduce weight and to increase strength.

On the rear cover (3), there are one or more angular cover supports (26) and one or more circular cover supports (27) located as intersecting each other around torque conveyor (7) to enhance rear cover (3) resistance against forces formed on rear cover as a result of centrifugal forces. At parts where angular cover supports (26) and angular cover supports (27) are not correspond and where it is required to provide some further strength, cover curving supports (30) are placed in these parts in required number and corresponding forms.

20

On angular cover supports (26) and on circular cover supports (27), preferably at crossings, there are more than one reinforcing support rings (29) in curved form. One or more cover perforations (28) preferably in circular form to facilitate the transmission of fluids and gases in drum (1) during the washing or drying cycle are provided between angular cover supports (26) and circular cover supports (27).

25

On the inner wall of the rear cover (3), one or more drum claws (15) are provided for the mounting preferable in various directions onto the main body (2).

5 In front of the main body (2), there is a front surface preferably in the form of a ring (19), whereas on the inner surface thereof, one or more body holes (9) to transfer fluids which the body contains, one or more trace concealing sockets (40) hiding the flash, which might have formed due to mold extraction from the inner surface during its production and one or more ribs (4) produced as single-piece with the main body, to activate laundry to be dried or washed by rotational
10 movement of drum (1) so as to increase drying or washing efficiency. Rib (4) comprise a rib gap (11) and a drum claw (16) fixing to the main body and rear cover (3) by claw locking the drum claw (15) into the rib gap (11).

On the main body (2), there is one or more rivet projections (12)
15 preferably of rectangular shape, and rivet recesses (31) in corresponding number and shape of rivet projections (12) so as to hold them on the rear cover (3).

The drum (1) contains one or more attachable plates (5) that have one or more rib holes to transmit fluids and gases, and can be mounted whenever desired
20 by the manufacturer, but cannot be moved away by user without seeking help from the manufacturer.

In another embodiment of the invention, attachable plate (5) is not utilized and body holes (9) are not drilled at parts where attachable rib (5) exists.

25

While the drum is manufactured, the torque conveyor (7), which is manufactured beforehand, is positioned into the mold preferably with the aid of a

mold centering projection. Plastics are injected into the mold to ensure that a part of the torque conveyor (7) is retained inside the rear cover material. At the same time, cover slots (28) are opened from the rear cover (3) inner wall towards the rear cover (3) outer wall by the help of inserts, preferably with countersink. In this way, formation of flash, inside the drum (1), particularly on and over the cover slots (28), causing damage to laundries are eliminated. Mold is opened to extract in single-piece rear cover (3) embodying torque conveyor (7). The main body (2), in turn, is manufactured with plastic injection as a single piece with ribs (4). In order to prevent the formation of flash, which harms laundry to be dried and washed, body holes (9) at parts where ribs (4) do not exist are drilled countersunk by means of cores from the drum inner wall towards its outer wall. Hiding the flash, which insert edges may leave behind on inner wall of the main body (2) is provided by using trace-concealing socket (40). For inserts to operate in the closed inner volume of the main body and for removing the main body (2) from the mold, it is not possible to drill perforations at some parts of the main body (2). If it is desired to drill perforations at such sites, using outer inserts, body perforations from outside to inwards are drilled. However, body perforations drilled there may cause flash at the inner side of the main body which harms laundry that will be washed or dried. In order to prevent such flash to harm laundries, attachable plates (5) having rib holes with countersink, manufactured as hollow and separately from the main body (3) in order eliminate imbalance of load distribution and not to prevent circulation of washing the fluid, are used over these harmful holes including flash. In this way, conveyance of flux such as gases and fluids existing there is also provided.

25

After attachable plates (5), rear cover (3) and the main body (2) are manufactured, and after attachable plates (5) are mounted on to the main body (3), drum claws (15) are fixed by pushing into drum claw recess (16) and in the meantime, the edge (10) seats on edge socket (14) such that edge coupling extension (13) fits into the edge piece coupling recess (18), and the edge coupling

30

recess (39) fits into the edge coupling projection and rivet projections (12) on the main body (2) are located inside the rivet cap (31) on the rear cover (3). After the drum claws (15) are placed inside the drum claw recess (16), rivet projections (12) on the main body (2) are heated and pressed thereto, rivet heads (32) in number as
5 much as number of rivet projections (12) and of width sufficient to prevent them to release from their housings are formed. So, on the rear cover (3), fixing is provided on several points and the main body (2) is fixed, without using any additional piece, with attachable plates and the rear cover (3).

10 Particularly, for drums (1) working under heavy torque conditions, and/or at high speed edge (10) and edge socket (14) are welded to each other using plastic fastening methods such as friction weld, hot point welding, laser welding to fix them.

15 In another embodiment of the invention, the edge (10) and edge socket (14) are fixed to each other using fastening means such as rivets or screws.

By means of connecting edge (10) to edge socket (14), the main body (2) and the rear cover (3) are fixed to each other and the drum (1) is formed without
20 any projection being apparent on its outer face. In this way, the drum (1) rotates inside the tub (23) in any direction around its axis, without causing any harm to tub.

As the drum (1) is made of polymeric materials, pieces, which form the
25 drum (1) may be produced in the same, different or in transparent colors.

CLAIMS

1. A drum (1) used in washing/drying machines preferably in front-loading washing machines, comprising a motor to operate the machine and a fixed tub (23) which holds the washing fluids; is located inside tub (23) to take in laundries
5 to be washed and dried; by which washing is provided by rotating it by means of the motor around its central axis; and is made of a polymeric material with or without filler; comprises a main body (2) and a rear cover (3), characterized in that the said back cover (3) comprising a circular edge (10) which surrounds the main body (2) and the main body (2) comprising an edge socket (14) in which the
10 edge (10) is located, the main body (2) and the rear cover (3) being connected to each other without forming any protrusion to prevent the rotation inside the outer surface of the said tub (23) .
2. A drum (1) as defined in Claim 1 characterized with the rear cover (3)
15 comprises an edge (10) having more than one edge coupling extension (13) and more than one edge coupling recess (39) at its tips, to facilitate the rotation of the main body easily.
3. A drum (1) as defined in Claims 1 to 2 characterized with the main body
20 (2) has an edge socket (14) comprises an edge coupling extension (13) suitable to edge socket coupling recess (18), and edge coupling projections (17) suitable to the edge piece coupling recesses (39).
4. A drum (1) as defined in Claims 1 to 3 characterized with the main body
25 (2) has edge socket (14) comprises a discharge duct (6) to facilitate the discharge of washing fluids on its outer surface and one or more discharge outlets (37) which open into the inner surface of the main body (2) on the discharge duct (6) .

5. A drum as defined in Claim 1 to 4, characterized with the rear cover (3) comprises a resting duct (21) onto which the edge socket (14) rests and where the edge (10) is joined.
- 5 6. A drum (1) as defined in Claims 1 to 5 characterized with the rear cover (3) comprises one or more drum discharge outlets (38) providing discharge of washing fluid collected on the edge where the rear cover connects to the main body (2) inside the resting duct (21).
- 10 7. A drum (1) in accordance with any of the previous Claims characterized with the main body comprises a front surface (19) in the preferably in the shape of a ring, one or more body holes (9) on its inner face to transmit the fluids inside the body, one or more trace concealing sockets (40) to hide the burrs formed due to mould pieces which remained on its inner wall in the course of mould extraction.
- 15 8. A drum (1) in accordance with any one of the previous Claims characterized with the main body (2) comprises one or more ribs (4) manufactured preferably in a single-piece with the said body, which improves the washing efficiency by activating laundries to be washed through a rotational movement of
- 20 the said drum.
9. A drum (1) as defined in Claim 8, characterized with the main body (2) comprises a rib (4) having a rib gap (11).
- 25 10. A drum (1) as defined in Claim 9 characterized with the rear cover (3) comprises more than one claw (15) for mounting onto the main body (2) preferably in various directions by sliding into rib gap (11).

11. A drum (1) as defined in Claim 10 characterized with the main body (2) comprises a draw claw recess (16) to fix the main body (2) and the rear cover (3) together by placing the draw claw (15) into the rib gap (11) for claws locking.

5

12. A drum (1) as defined in any one of the previous Claims characterized with the main body (2) comprises rivet projections (12) the preferably in rectangular shape to reinforce connection with the rear cover (3).

10 13. A drum (1) as defined in Claim 12 characterized with the rear cover (3) comprises rivet sockets (31) in corresponding number and shape with the rivet projections (12), into which the said rivet projections (12) are placed.

14 A drum (1) as defined in Claim 13 characterized with the main body (2)
15 comprises rivet heads (32) made by heating the rivet projections (12) and pressing them of width sufficient to prevent the rivets are not released from their sockets.

15. A drum (1) as described in any of the previous Claims characterized with the rear cover (3) comprises a torque conveyor (7) to transmit power from motor
20 to enable rotation on its outer surface that does contact the laundry manufactured as single-piece with this former from a material different than one by which this former is manufactured.

16. A drum (1) as defined in Claim 15 characterized with the rear cover (3)
25 comprises more than one angular cover supports (26), more than one circular cover supports (27) and more than one cover curving supports (30) of appropriate form to be placed at sites where angular and circular covers do not correspond and

require strengthening, located around torque conveyor to enhance strength against forces formed due to centrifugal forces.

17. A drum (1) as defined in Claim 16 characterized with the rear cover (3)
5 comprises one or more curved reinforcing support rings (29) on angular (26) and circular (27) cover supports preferably at junctions.

18. A drum (1) as defined in Claim 7 characterized with the rear cover (3)
10 comprises one or more cover lot (28), preferably circular and located between the radial cover supports (26) and circular cover supports (27), to facilitate the transmission of fluids and gases accumulated inside drum (1) during washing or drying.

19. A drum (1) in accordance with any previous Claims, characterized with
15 attachable plates (5) that can be mounted according to manufacturer's options but cannot be removed by user without the help of the former.

20. A drum (1) in accordance with any one of the previous Claims formed
pieces of the same colors.

20

21. A drum (1) in accordance with any one of the previous Claims formed
pieces of different colors.

22. A drum (1) in accordance with any one of the previous Claims formed
25 pieces of transparent colors.

Figure 1


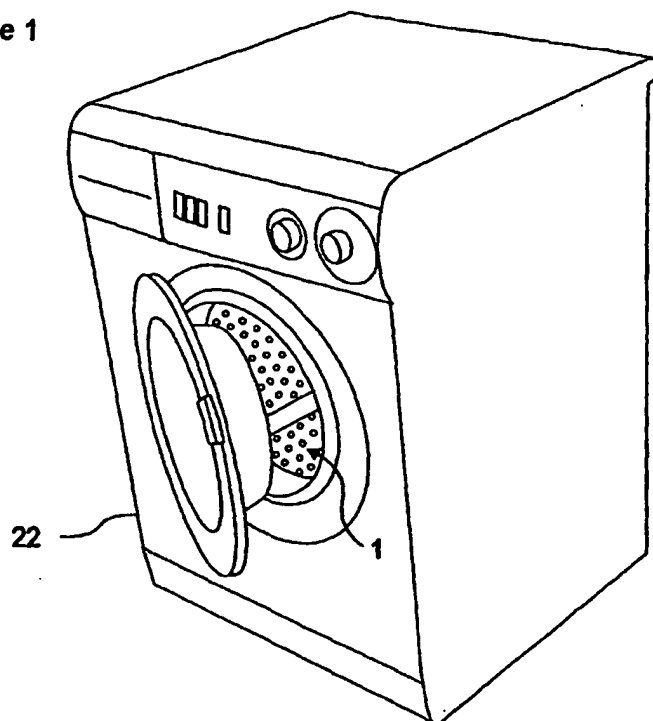


Figure 2

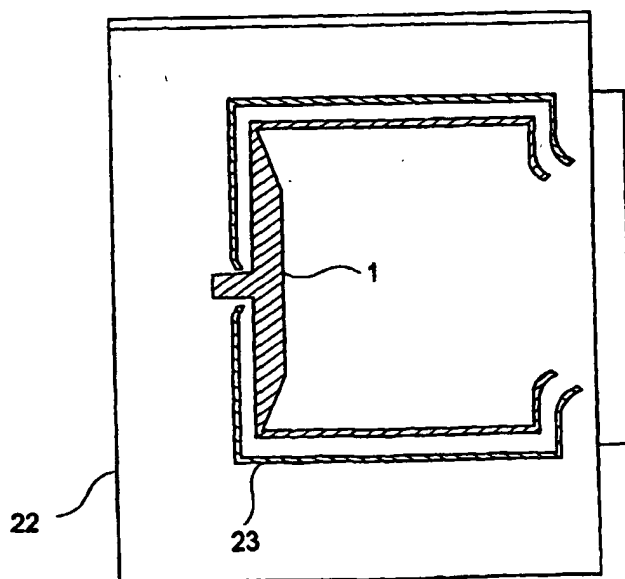

2 / 10

Figure 3a



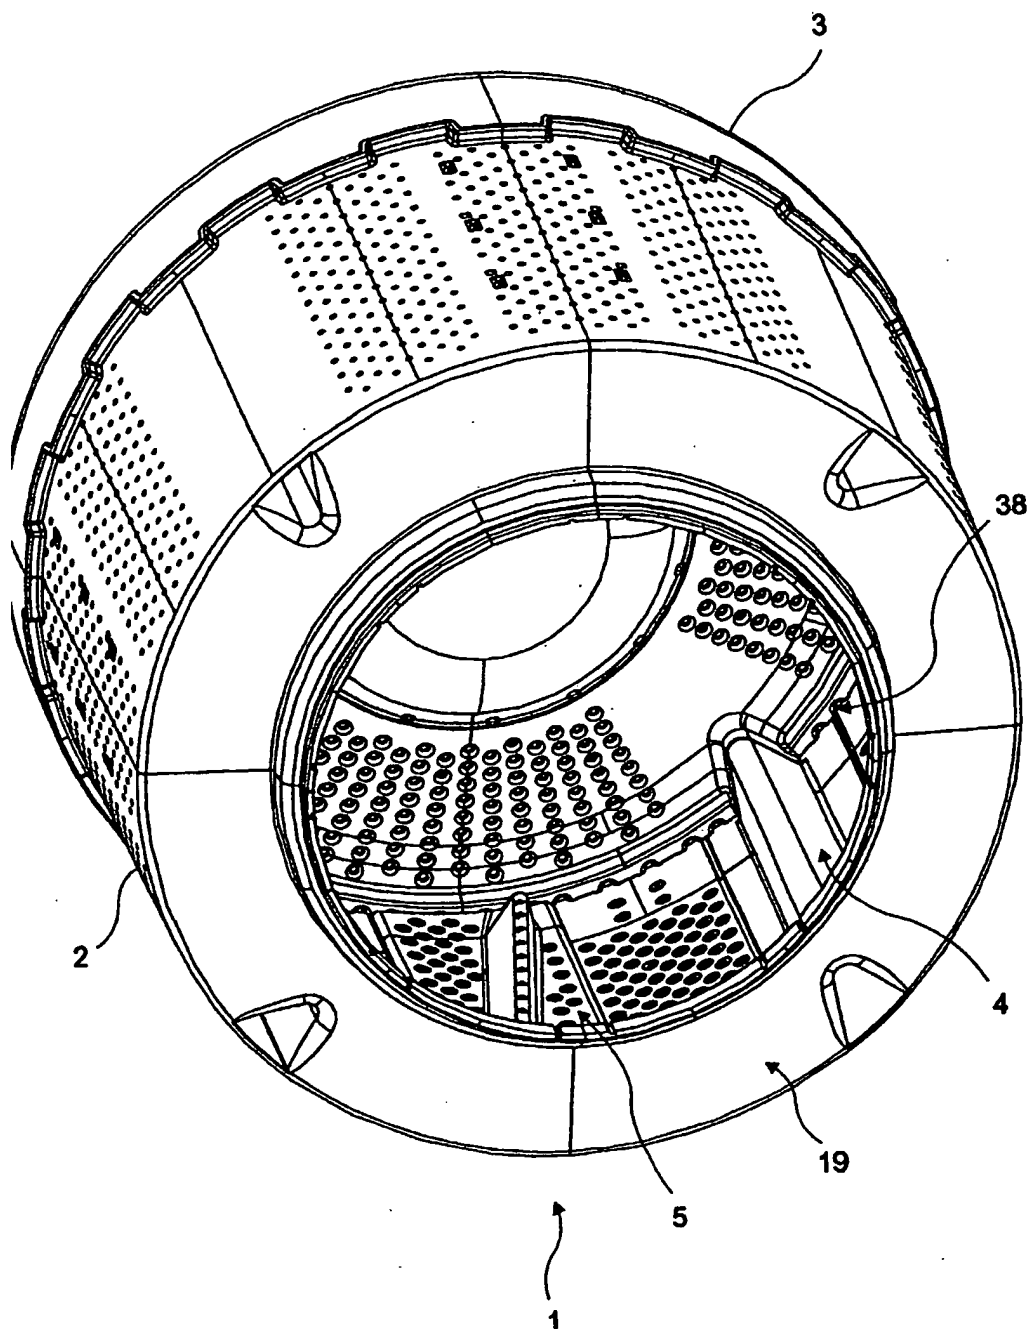


Figure 3b

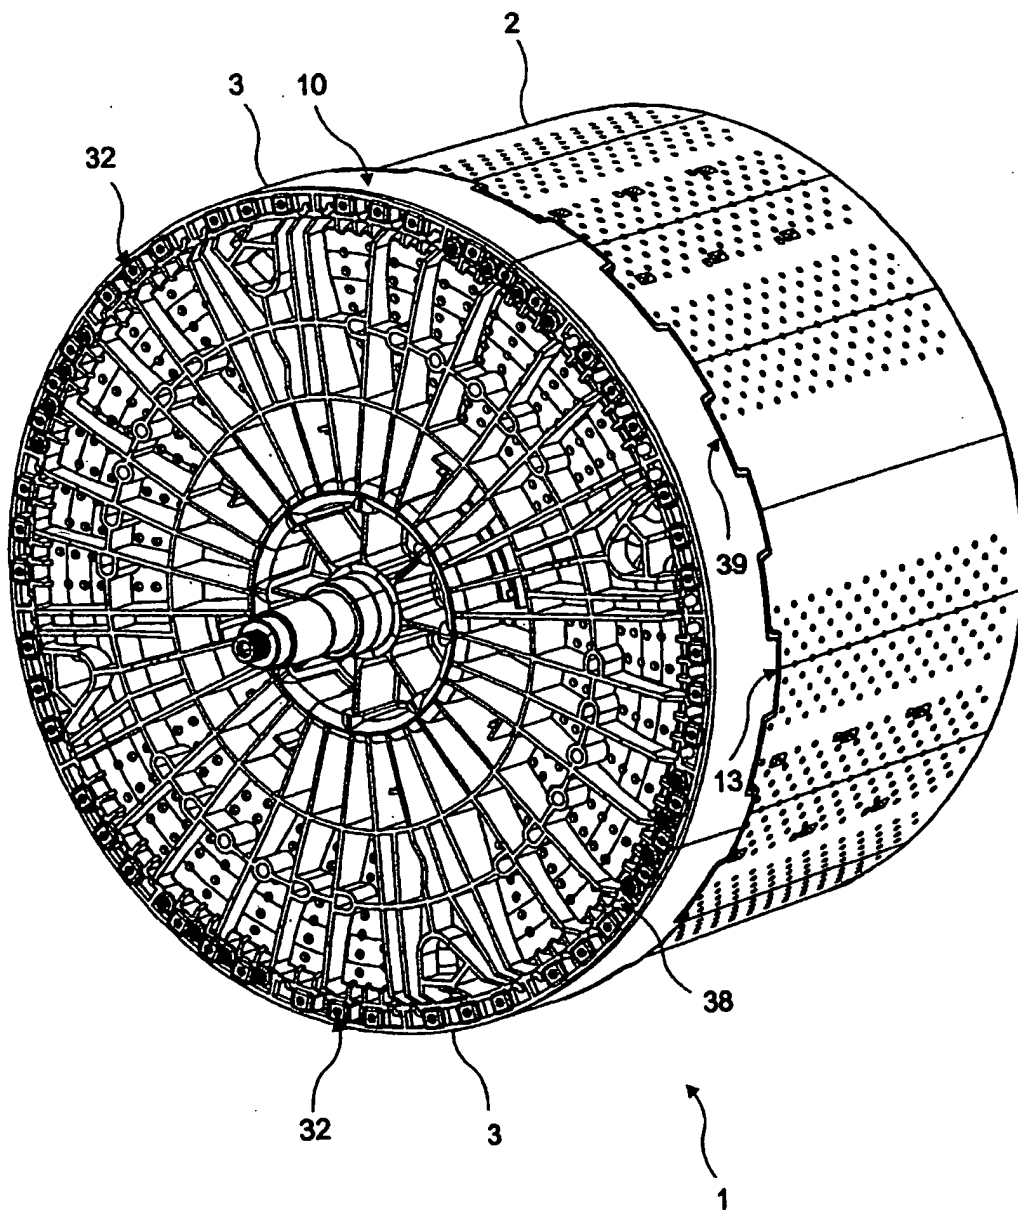


4 / 10

Figure 4a

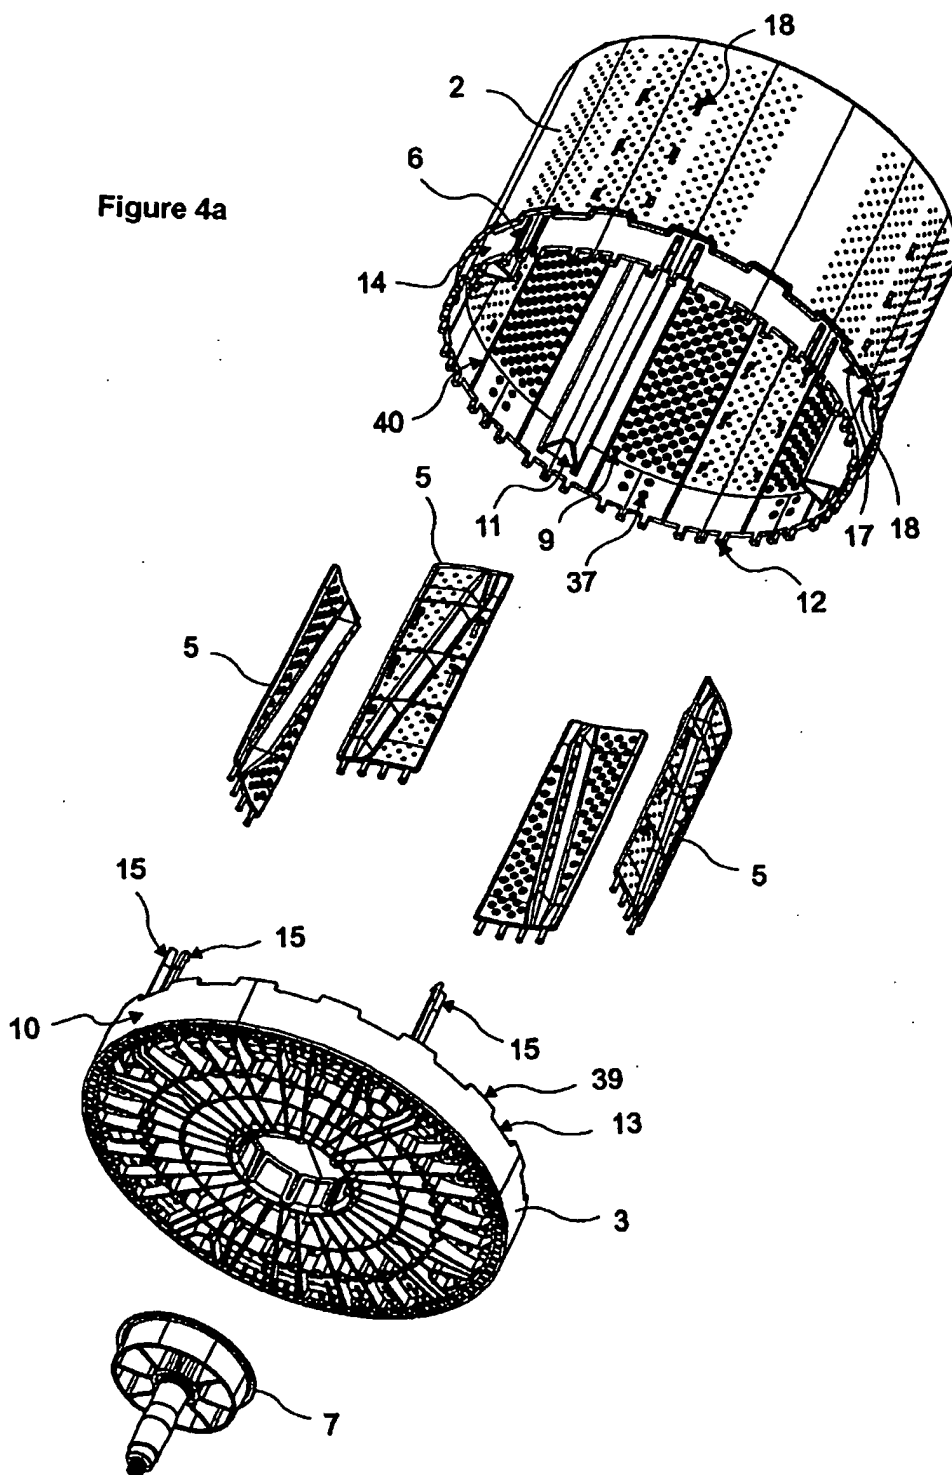

5 / 10

Figure 4b

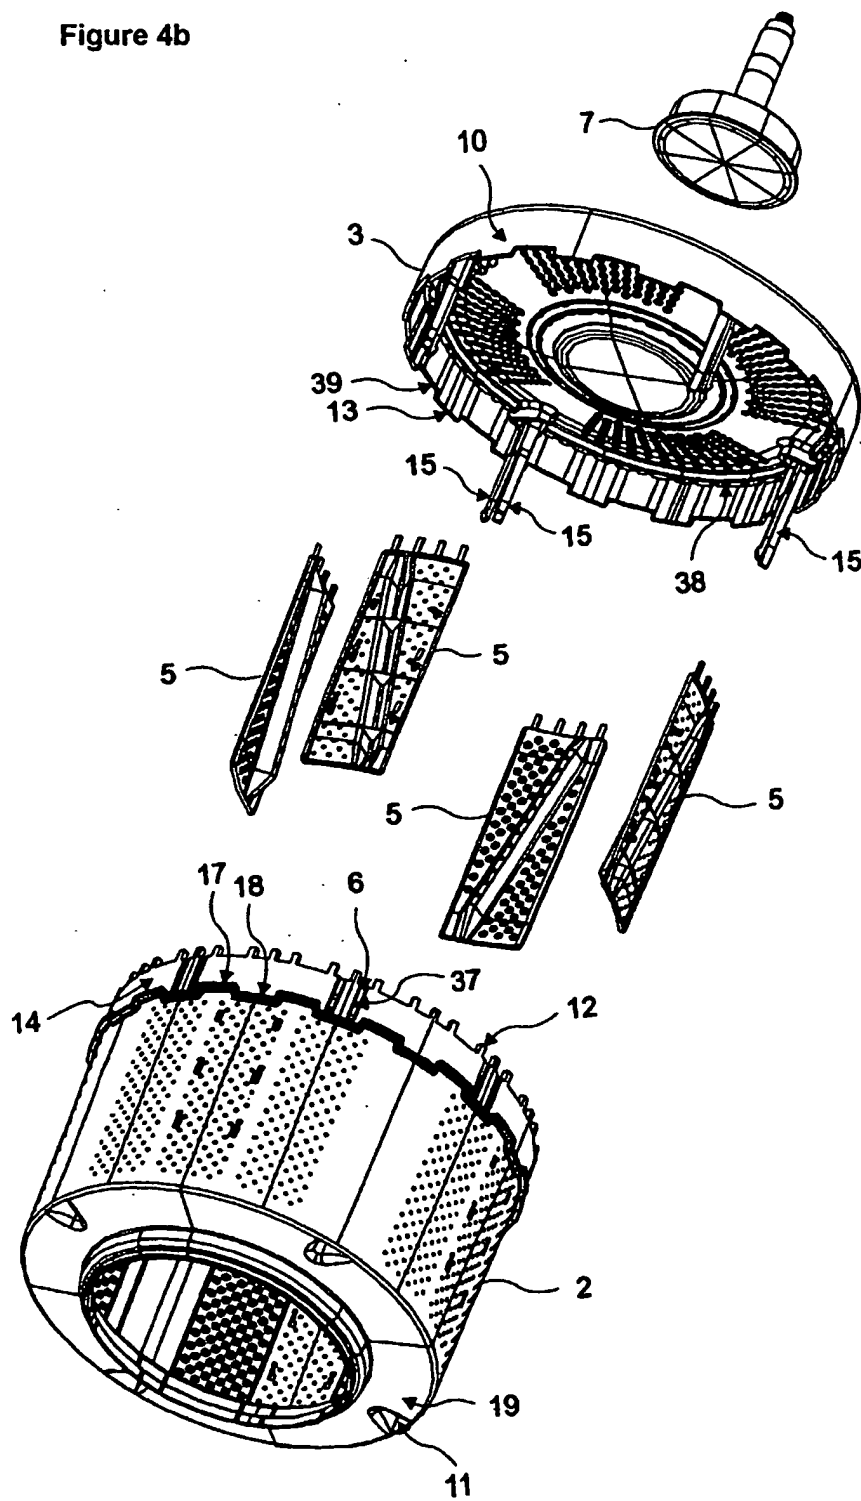

6 / 10

Figure 5a

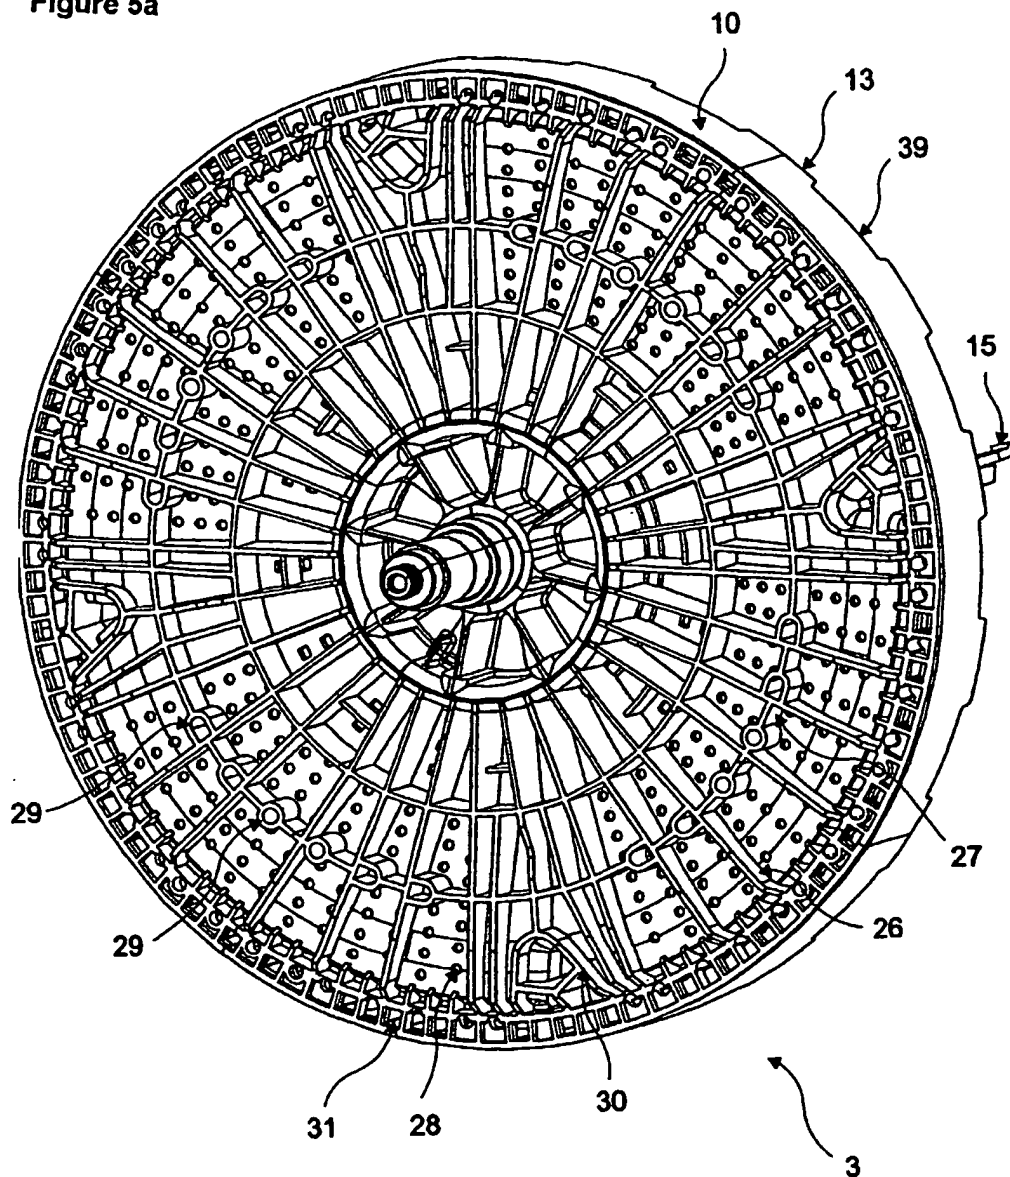


Figure 5b



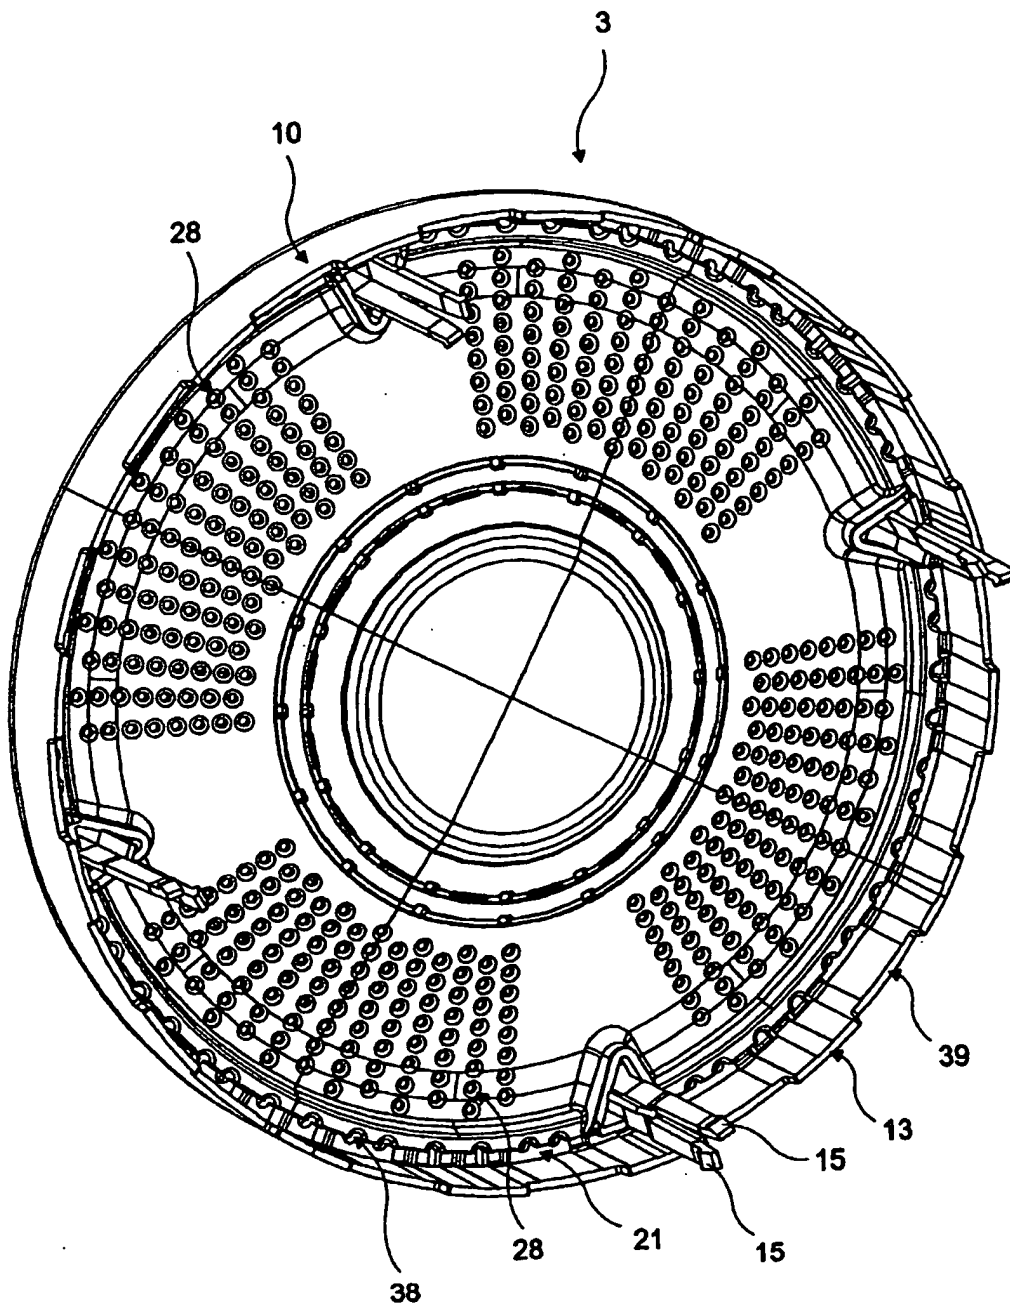


Figure 6a

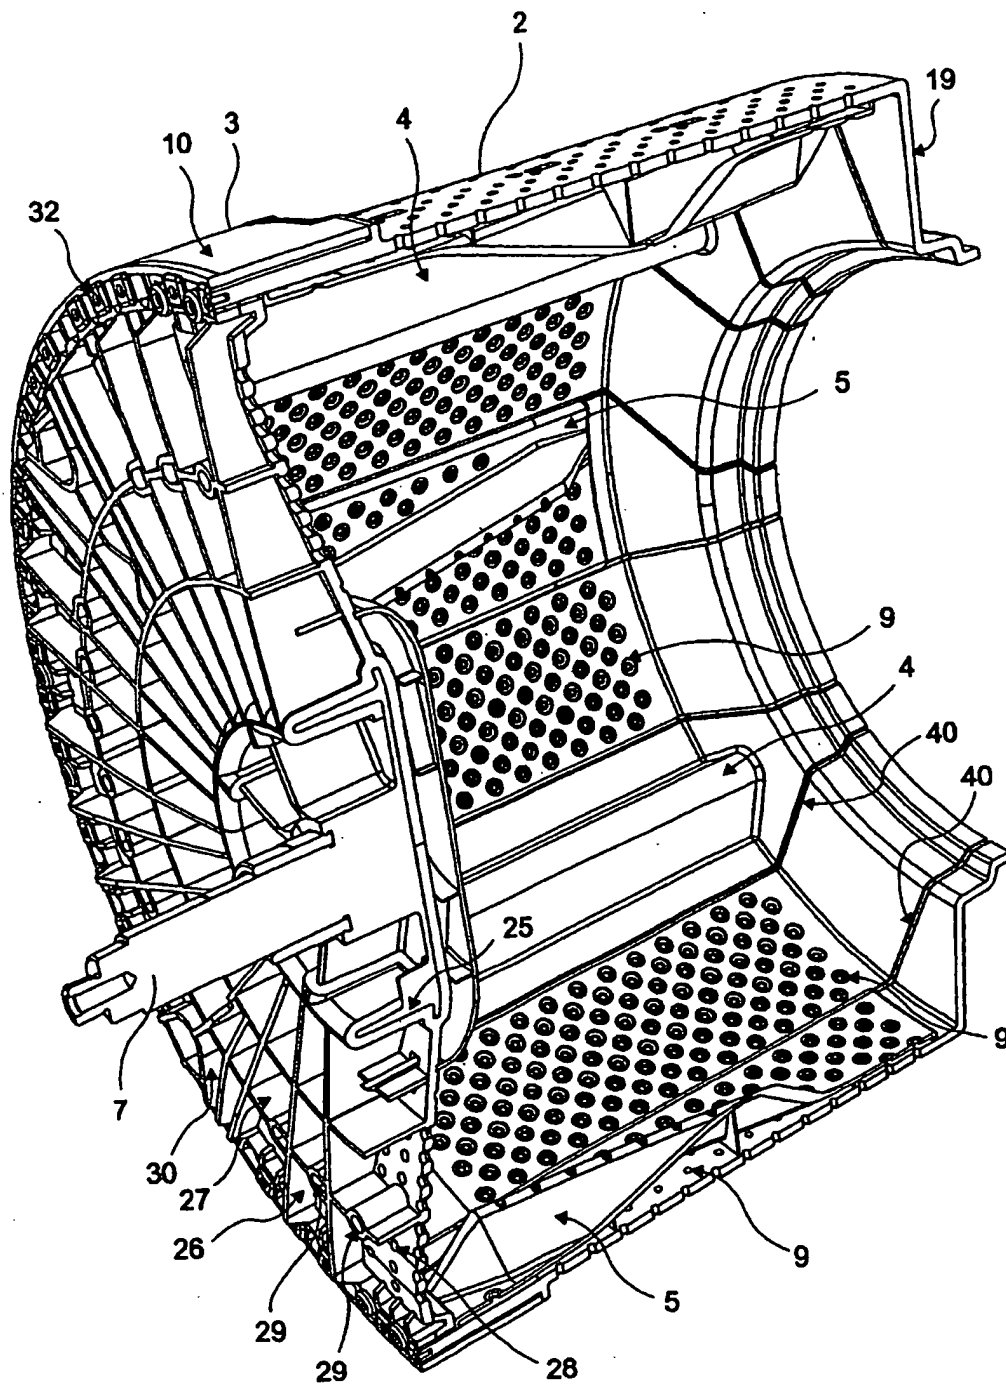

9 / 10

Figure 6b

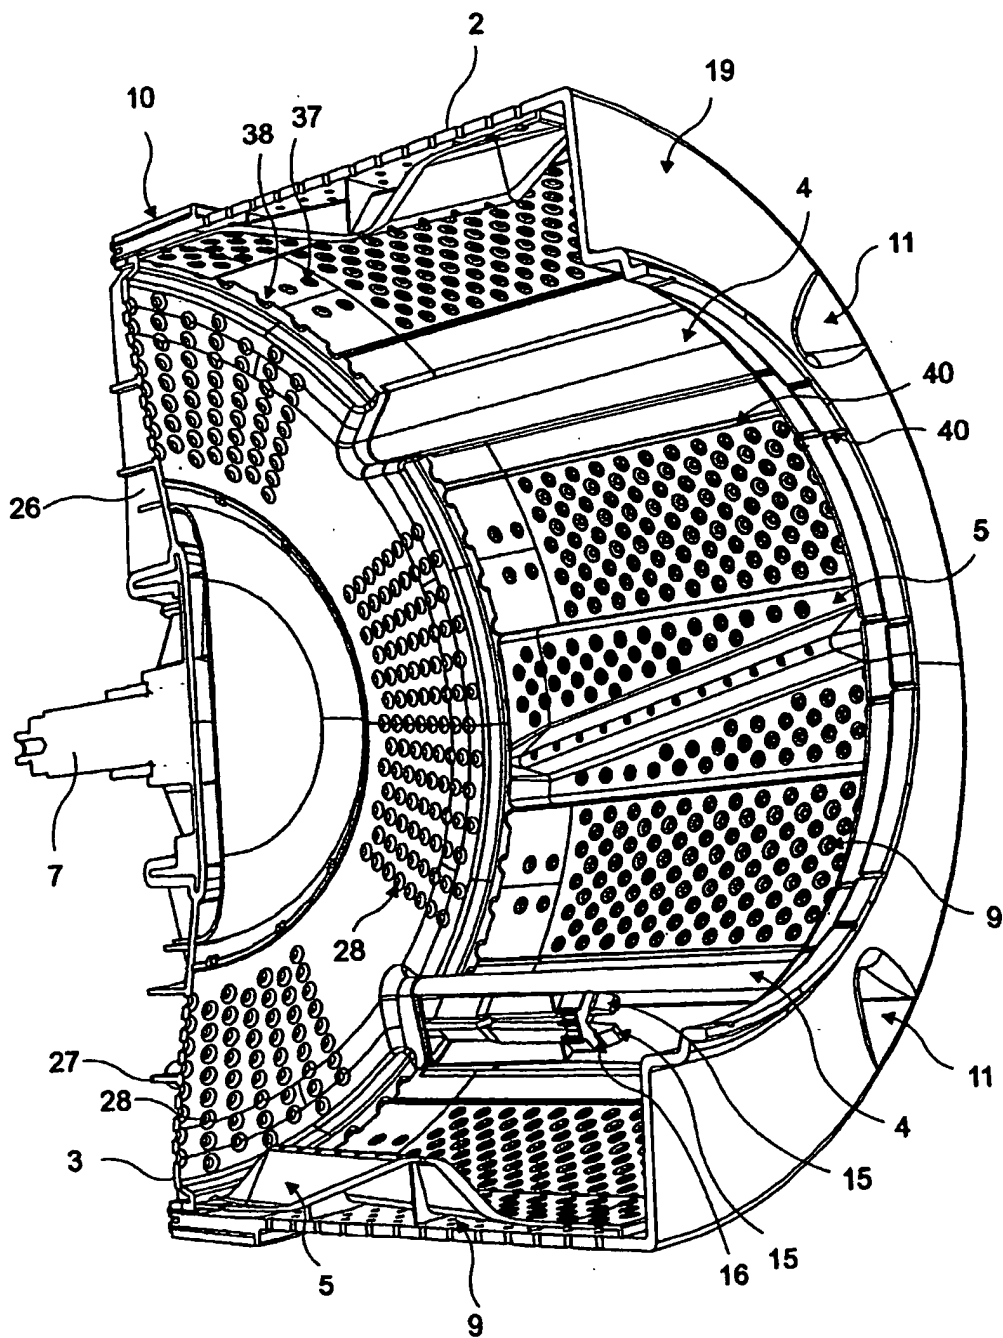

10 / 10

Figure 7a


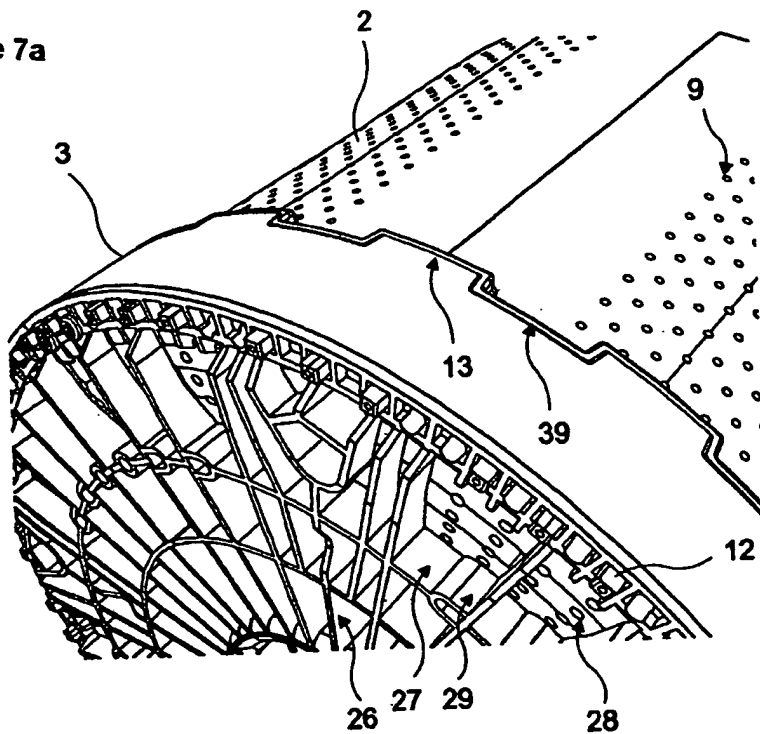


Figure 7b

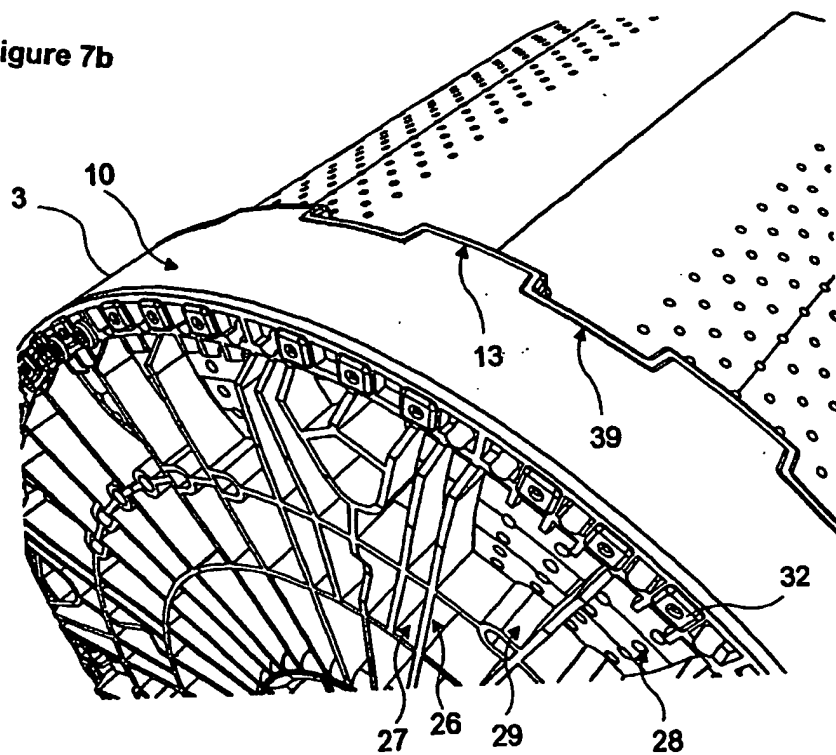

INTERNATIONAL SEARCH REPORT

International Application No
PCT/TR 03/00043

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 D06F37/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 853 824 A (LADEN S A) 9 November 1960 (1960-11-09)	1,2,5,8, 9,12,13, 19
A	the whole document ---	14
A	DE 12 36 457 B (HANNING ROBERT) 16 March 1967 (1967-03-16) the whole document ---	1-3,5, 8-11,15
A	EP 0 789 104 A (BALAY SA) 13 August 1997 (1997-08-13) cited in the application abstract; figures ---	1-22
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

S document member of the same patent family

Date of the actual completion of the international search

15 September 2003

Date of mailing of the international search report

24/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Falkentoft, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/TR 03/00043

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01 44556 A (BSH BOSCH SIEMENS HAUSGERAETE ;HEYDER REINHARD (DE); SKRIPPEK JOER) 21 June 2001 (2001-06-21) abstract page 1, line 30 -page 2, line 11 page 3, line 17-30; figure 1 ----	1,15-17
A	GB 2 333 300 A (ELECTROLUX ZANUSSI ELETTRODOME) 21 July 1999 (1999-07-21) abstract; figure 3 ----	1,15-17
A	US 5 167 898 A (LUTHER LEROY D) 1 December 1992 (1992-12-01) cited in the application abstract column 4, line 49 -column 5, line 9; figures 2,3,11 ----	1,4,6,7, 18
A	WO 98 48095 A (MIRAMONDI SRL ;MIRAMONDI PIETRO (IT)) 29 October 1998 (1998-10-29) abstract page 3, line 16 -page 4, line 13 page 8, line 3-25 page 11, line 6-19; figures -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/TR 03/00043

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 853824	A	09-11-1960	NONE	
DE 1236457	B	16-03-1967	NONE	
EP 0789104	A	13-08-1997	ES 2102973 A1 DE 69613809 D1 DE 69613809 T2 EP 0789104 A1	01-08-1997 16-08-2001 20-12-2001 13-08-1997
WO 0144556	A	21-06-2001	DE 19960501 A1 CN 1409782 T WO 0144556 A1 EP 1240376 A1 JP 2003516836 T US 2002194884 A1	21-06-2001 09-04-2003 21-06-2001 18-09-2002 20-05-2003 26-12-2002
GB 2333300	A	21-07-1999	IT PN980002 U1 DE 29821140 U1 ES 1041741 U1 FR 2773827 A1	20-07-1999 28-01-1999 16-07-1999 23-07-1999
US 5167898	A	01-12-1992	US 5431556 A US 5287989 A	11-07-1995 22-02-1994
WO 9848095	A	29-10-1998	IT MI970975 A1 AU 7232098 A BG 103817 A BR 9808695 A CN 1257559 T EP 1012371 A1 WO 9848095 A1 PL 336531 A1 RU 2182197 C2 SK 144999 A3 TR 9902648 T2 US 6401363 B1	26-10-1998 13-11-1998 30-06-2000 03-10-2000 21-06-2000 28-06-2000 29-10-1998 03-07-2000 10-05-2002 12-06-2000 22-05-2000 11-06-2002